


Jet black: KDE - BLK - 450
Snow white: KDE - WHT - 450
Ash grey: KDE - GRY - 450

Product number:
Pebbles: KDE - PEB - 900
Anthracite: KDE - ANT - 900
Forest: KDE - GRY - 900
Silver: KDE - SLV - 900


Soft / Soft Trend

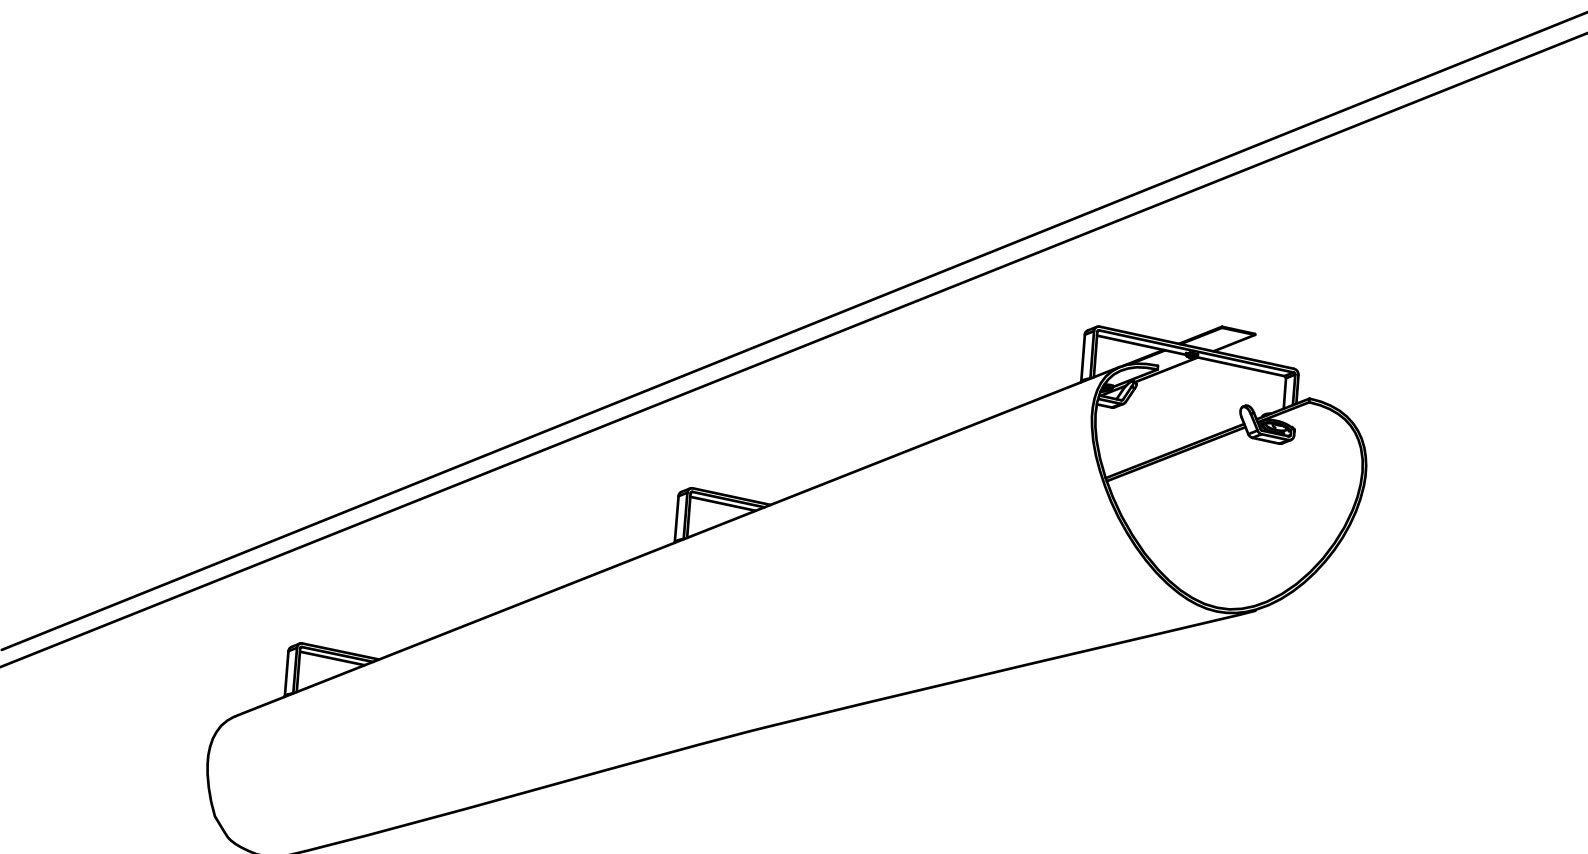


Technical Data

Manufacturing process	DIN 61151	Needle Felt
Pile composition	-	100% PP
Surface structure	-	Dilour
User class	-	32
Backing	ISO 2424	None - latex free
Impact noise reduction	-	24 dB
Permanent anti-static	ISO 6356	≤2 kV
Prodis GUT Certificate	-	943358A6
File Classification	EN 13501-1	Bfl-s1

Includes :

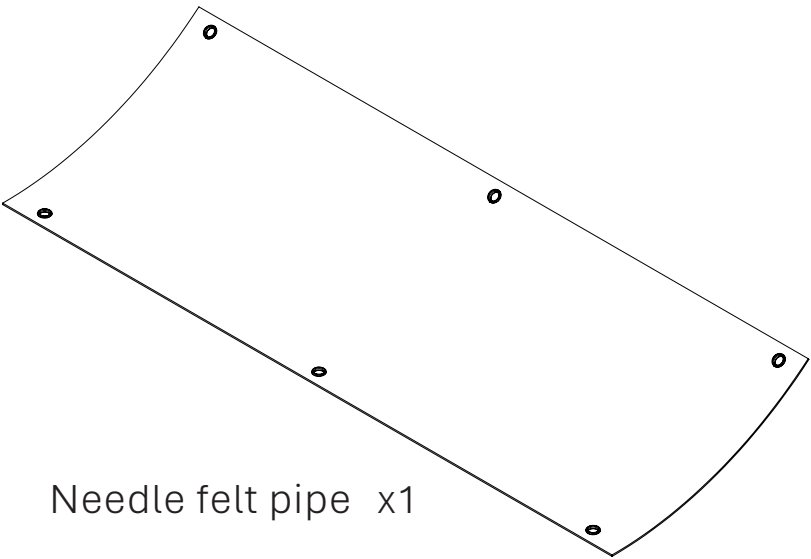


Needle felt pipe x1



x3

Metal arches



Mounting Strip x1



Screws x3

Installation

